

### APPLICATION

Our Electric Actuation Roof Hatches are designed to provide convenient, economical access to the roof of a building with the ease of automation. By adding an electric actuator, our hatch can be opened and closed remotely. This feature is available on small ladder access hatches, and more importantly on larger equipment hatches, which are typically heavy and difficult to operate.

### FEATURES

- Choice of operating switch and/or remote control
- 12V/24V DC Electrical Actuator. Suitable for mains supply AC 120V/60Hz or 230V/50Hz
- Can open to any angle up to 80 degrees max
- Battery back-up
- Synchronized operation for large sizes
- G90 Galv. Steel
- Stainless Steel Hardware

### SPECIFICATIONS


**COVER:** Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft

**CURB:** 1" thick fiberboard roof insulation at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting holes

**OPENING:** Convenient electric actuation with options of Push Button Switch, Key Switch and/or Remote Control. Can be kept open at any angle for ventilation. Single covers with more than one actuator operate on synchronous mode. Hatches with more than one cover have at least two actuators which need to be operated in sequence. Battery back-up is provided for emergency exits to ensure power supply in case of power outage. Control Box keeps the batteries charged.

**DOOR LATCH:** Self Locking feature of Electric Actuator replaces need for conventional locks in standard designs Additional locking arrangements available upon request.

**FINISH:** Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel paint.

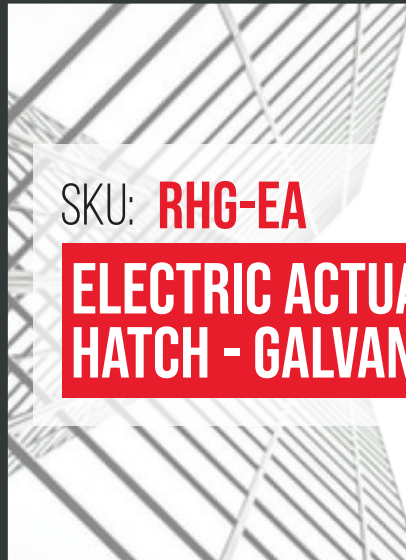

SKU: **RHG-EA**

## ELECTRIC ACTUATION ROOF HATCH - GALVANIZED STEEL



### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


MODEL	CURB ID L&W INCHES (MM)	WEIGHT	
		LBS	KG
EG3232	24 x 24 (610 x 610)	125	56.80
EG3244	24 x 36 (610 x 914)	135	61.40
EG3838	30 x 30 (762 x 762)	140	63.50
EG3844	30 x 36 (762 x 914)	155	70.50
EG3862	30 x 54 (762 x 1372)	135	61.40
EG3804	30 x 96 (762 x 2438)	335	152.3
EG4444	36 x 36 (914 x 914)	170	77.30
EG5656	48 x 48 (1219 x 1219)	185	83.00

Special sizes up to 197" x 197" available upon request

#### OPTIONAL FEATURES

- Stainless Steel Hardware
- Louvered Curbs
- Curb Mounted Units
- Curb pitch corrected for sloped roof

MANUFACTURED BY ACUDOR

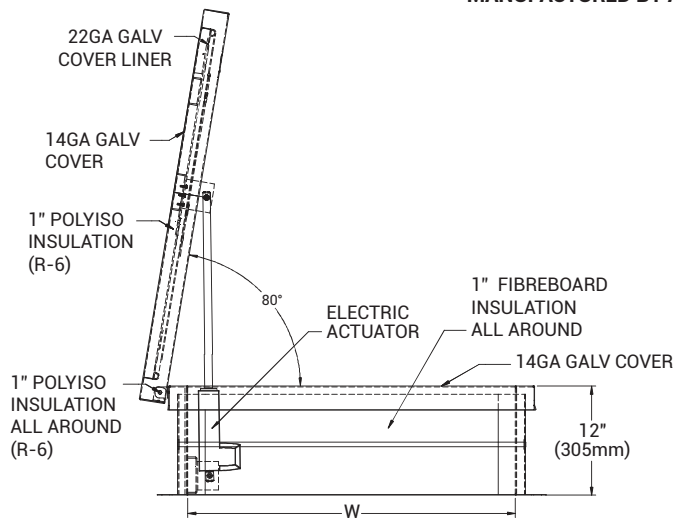

Proprietary property of Acudor Products, Inc., sold and distributed with proper authorization



For a complete list of options visit [www.AcudorAccessPanels.com](http://www.AcudorAccessPanels.com)

### PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and Additional Product Info.



TELEPHONE:  
1-888-622-8367  
FAX:  
1-888-626-2907



PO BOX 4668  
PMB 76520  
NEW YORK,  
NEW YORK 10163-4668  
US



WEBSITE:  
[www.AcudorAccessPanels.com](http://www.AcudorAccessPanels.com)  
E-MAIL:  
[info@AcudorAccessPanels.com](mailto:info@AcudorAccessPanels.com)